



Evolution STARCH OFF ULTRA

Operation Guide

NEW
PATENTED TECHNOLOGY

A LOT MORE
BOARD

STRONGER
BOARD

FLATTER
BOARD



Before



After

CLEANED IN UNDER 30 MINUTES



EVOLUTION STARCH OFF ULTRA

YOUR CORRUGATORS ARE ALWAYS CLEAN. A COMPLETE INTERNAL AND EXTERNAL SOLUTION FOR YOUR PLANT

Evolution STARCH OFF ULTRA



INSTALLATION:

1. Install our automated patent pending ESOU delivery system (Ecochem supervised). Our installation includes a Ecochem supplied hot water service for **149°F/65°C** temperature control and dilution device to a tap and hose to fill pots and foam gun for daily manual application to external surfaces.
2. For deep system cleaning, manually diluted ESOU from your starch kitchen at the higher temp of **167-185°F/75-85°C** is circulated and recycled through pipes, pumps, tanks, over rolls and glue pots for 2 - 4 hours weekly. (See notes below)
3. We require a suitable position for ESOU 264 gallon/1000 litre container with easy and safe forklift access.




OPERATING INSTRUCTIONS

1. For daily cleaning, foam ESOU on external equipment diluted to 1:5 (20%) and **heated to 131-149°F/55-65°C** controlled by a hot water system we install in your plant and reapply three times and **allow to soak** for 10 minutes. Rinse clean with water for a full wash-up in under 30 minutes.
2. For weekly cleaning, dilute ESOU concentrate with warm water at **167-185°F/75-85°C** heated from your plant's starch kitchen boiler system to make the amount required to circulate through your corrugator. For normal build up, circulate ESOU through system at **167-185°F/75-85°C** at 1:10 (10%) for a **full clean in under 2 hours**. Circulate for 4 hours for heavy buildup. **DO NOT USE DIRECT STEAM INJECTION into the ESOU, it is above the optimal temperature and will destroy the enzymes. If PVC piping is used, temperature must be restricted to 122°F/50°C**
3. Rinse system clean with water through all the equipment and run to waste.



PRODUCT SUPPLY

EVOLUTION STARCH OFF ULTRA is supplied in 264 gallon/1000 litre bulk containers to be diluted to 1:5 (20%) with water. It can be applied manually or automatically.

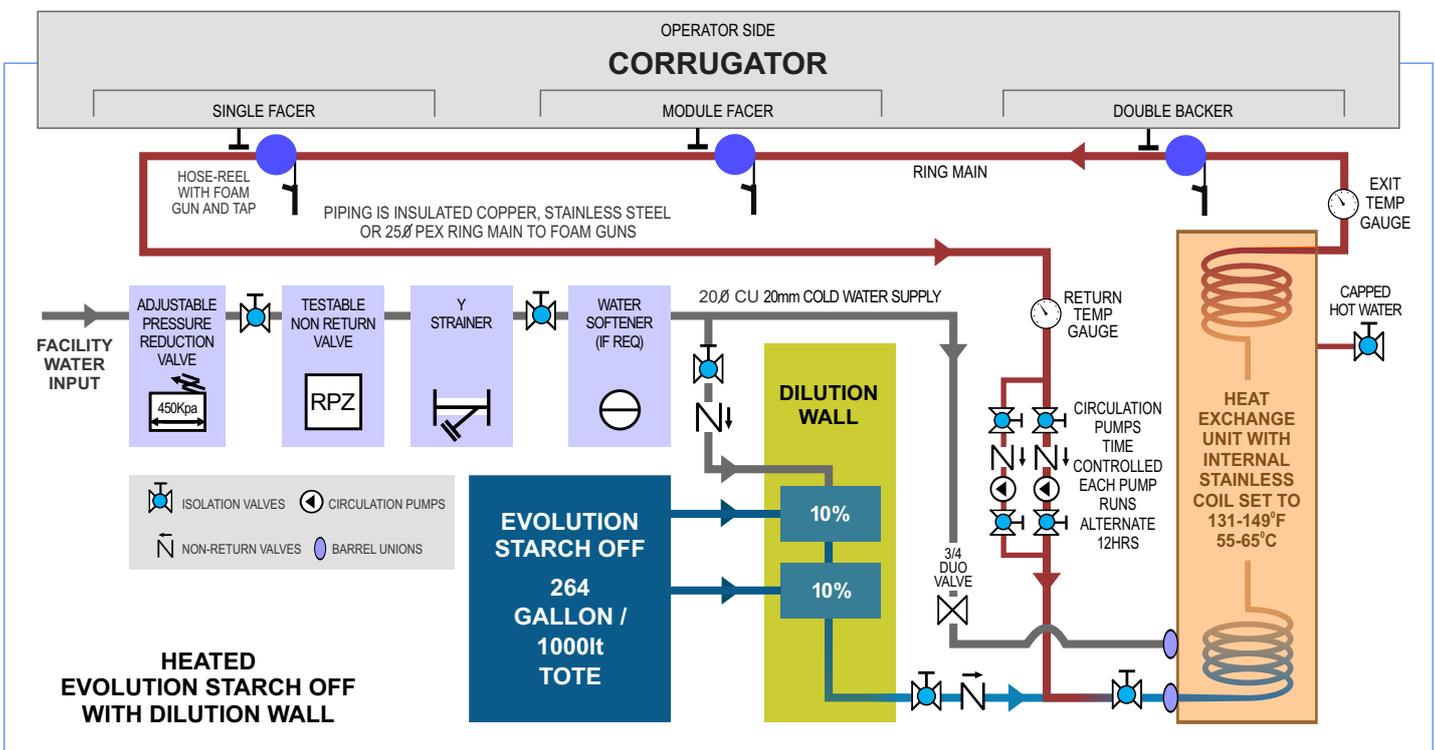


Evolution STARCH OFF ULTRA



Batch Controller Instructions

1. Calculate volume of product required in litres
10% of tank water volume is the amount of solution required.
Thus, divide the volume of your tank by 10.
Example
If water tank volume is 1000 litre
Then divide 1000 by 10 = 100
= (10%)

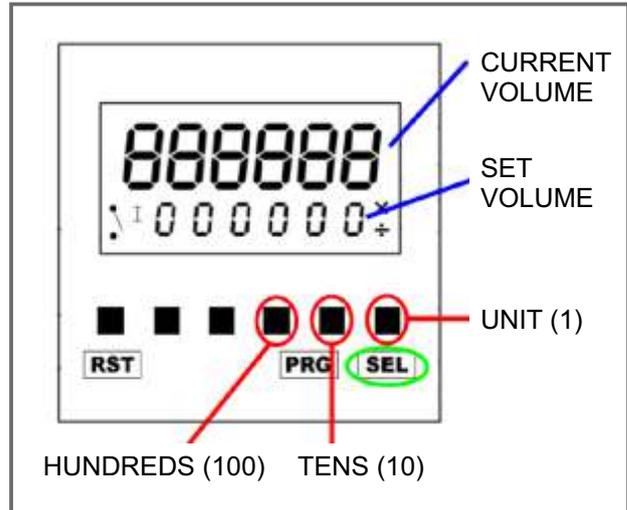

2. Enter amount from step 1.
 - 2.1. Press "SEL" button (Circled in green). Use this button to change the amount of ESO required. Once initial set up is done this does not need to be changed.
 - 2.2. Use buttons circled in red for units, tens and hundreds.
 - 2.3. Press "SEL" button when done.
3. Press "START" button on front of case
4. Pump will start up.
5. Once volume is reached the pump will stop.

In the case of an incorrect entry, reset the system by turning the power off for 10 sec and turn back on. Note: RST and PRG buttons are not used in this system.

Use emergency stop button if necessary. System will remember the last setting and metered amount for up to 5 min.

Check numbers entered before starting to ensure correct amount has been set.

EVOLUTION STARCH OFF ULTRA is optimised, unique, simple, safe and effective

Contact us now for more information and a convincing on-site demonstration



Ecochem Australia Pty Ltd
110 South Mountain Road
Upper Plenty, VIC. 3756
Ph: +613 5783 2902
Mob: +61 448 823 309



Go online to
Evolution Starch Off Ultra